

Changing the filter.




You will need a large plastic garbage bag to dispose of the old filters. You will also need a pair of work gloves and a Phillips head screwdriver.



1 Unplug the unit from its power outlet.



2 Turn the unit upside down on a soft surface to avoid scratching the unit.

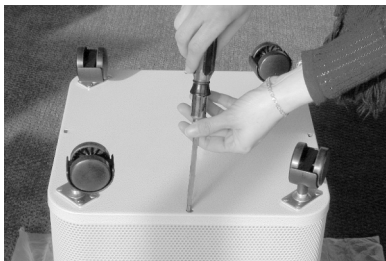

3 Remove the 4 retaining screws from the bottom cover.




4 Lift the bottom cover off and set it aside.




5 Wearing your work gloves, grasp the filter, carefully lift it out and place in a plastic trash bag.



6 Remove the pre-filter.

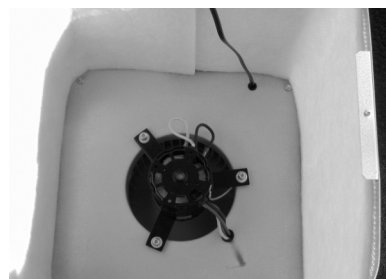

7 Replace pre-filter as shown.

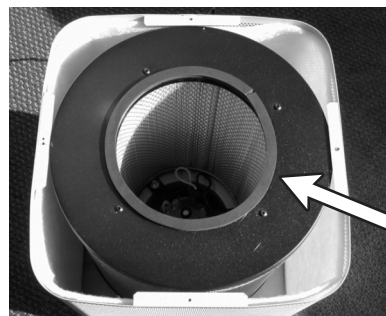

8 Install new filter as shown. Make sure label side is down toward the motor. Note position of bottom seal vs. top.

9 Replace bottom cover.

10 Replace 4 screws.

11 Run the filter on high for at least 1 hour.

CAUTION: FILTER MAY HAVE SHARP EDGES... PLEASE WEAR GLOVES!